RNAV (GPS) RWY 32

BARKLEY RGNL (PAH)

WAAS	APP CRS	Rwy Idg	5324
CH 61033	320°	TDZE	409
W32A		Apt Elev	410

Circling to Rwy 14 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mayfield altimeter setting and increase all DA 61 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile; increase all MDA 80 feet, LNAV Cats C and D visibility ⅛ mile and Circling Cat D visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Straight-in minimums NA at night. Baro-VNAV NA when using Mayfield altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZIVAT and hold.

ASOS	MEMPHIS CENTER	PADUCAH TOWER ★	GND CON	UNICOM
118.375	133.65 292.15	119.6 (CTAF) (L) 306.9	121.7 306.9	122.95

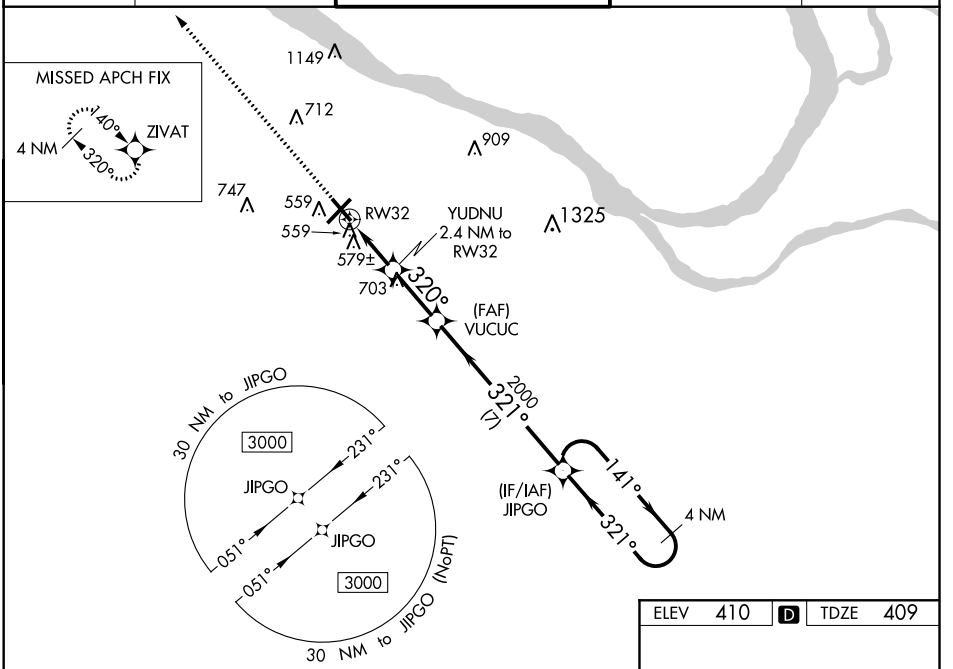

ELEV 410	D	TDZE 409

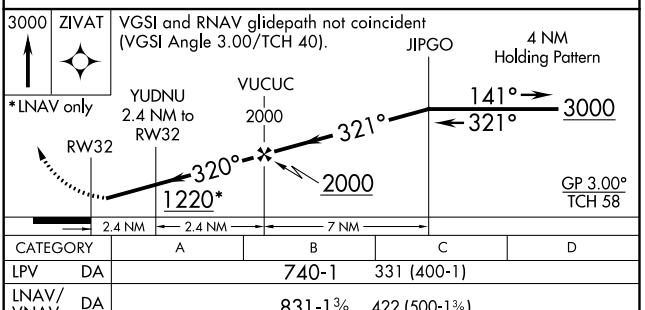

CATEGORY	A	B	C	D
LPV DA	740-1 331 (400-1)			
LNAV/VNAV DA	831-1⅜ 422 (500-1⅜)			
LNAV MDA	840-1 431 (500-1)		840-1¼ 431 (500-1¼)	
C CIRCLING	880-1 470 (500-1)		880-1½ 470 (500-1½)	1100-2 690 (700-2)



HIRL Rwy 4-22 (L)
MIRL Rwy 14-32 (L)
REIL Rwys 22 and 32 (L)

SE-1, 03 DEC 2020 to 31 DEC 2020
SE-1, 03 DEC 2020 to 31 DEC 2020