ILS Y or LOC Y RWY 1

GREENVILLE DOWNTOWN (GMU)

LOC I-GMU	APP CRS	Rwy Idg	5393
109.7	006°	TDZE	1015
		Apt Elev	1048

RNAV-1 GPS required for procedure entry.
ADF required.

ASR When local altimeter setting not received, use Greer altimeter setting and increase S-ILS 1 DA to 1245, increase all MDAs 40 feet and visibility S-LOC 1 Cat C and D 1⅛ SM and Circling Cat C visibility ¼ SM. Inop table does not apply to S-ILS 1.

MALSF

MISSED APPROACH: Climb to 1500 then climbing right turn to 2900 direct JUDKY LOM and hold, continue climb-in-hold to 2900.

ATIS★	GREER APP CON★	GREENVILLE TOWER★	GND CON	UNICOM
127.075	118.8 270.275	119.9 (CTAF) L 257.7	121.25	122.95

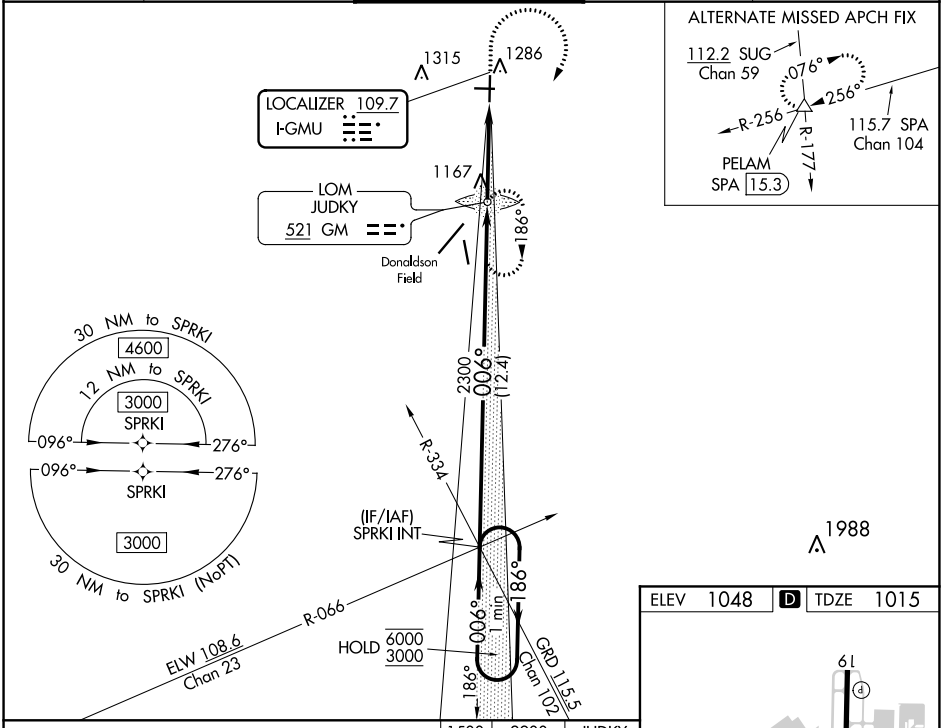

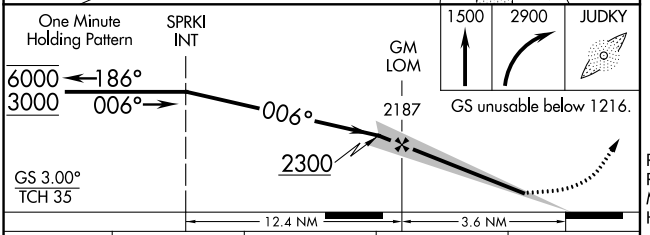

CATEGORY	A	B	C	D
S-ILS 1	1216-¾ 201 (200-¾)			
S-LOC 1	1540-¾ 525 (500-¾)		1540-1¼ 525 (500-1¼)	
C CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

FAF to MAP 3.6 NM

Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

SE-2, 03 DEC 2020 to 31 DEC 2020
SE-2, 03 DEC 2020 to 31 DEC 2020