WAAS CH 49219 W16A	APP CRS 160°	Rwy Idg 5000 / TDZE 573 / Apt Elev 586

RNAV (GPS) RWY 16

SHELBY COUNTY (EET)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Birmingham altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C/D and Circling Cats C/D visibilities ¼ mile. Baro-VNAV NA when using Birmingham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).

MISSED APPROACH: Climb to 3000 direct CABVU and hold.

ASOS	BIRMINGHAM APP CON	GCO	UNICOM
134.325	123.8 256.8	121.725	122.7 (CTAF) L

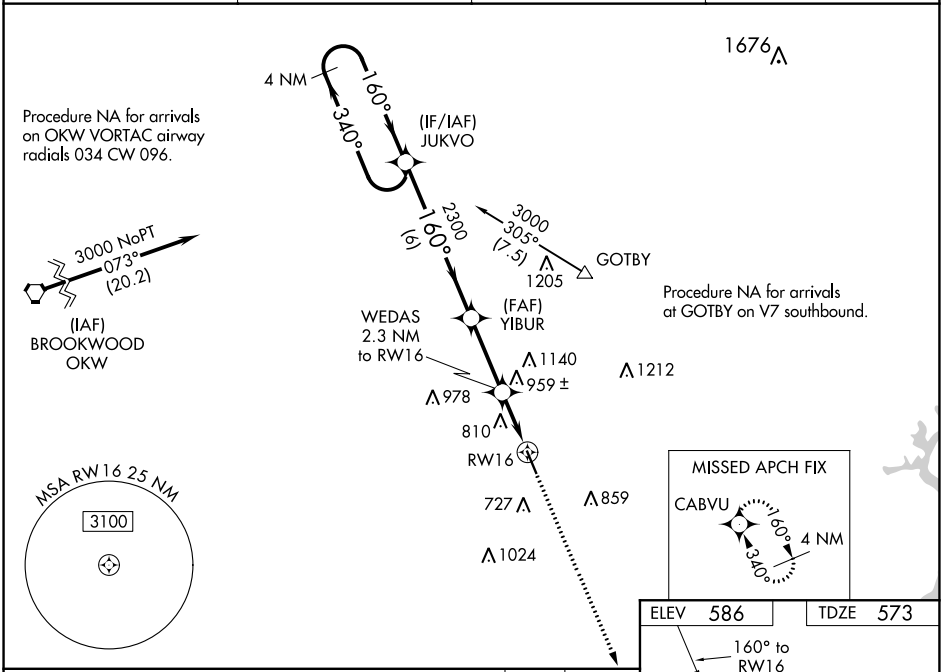

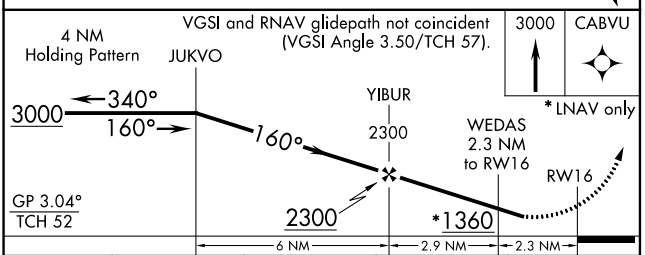

CATEGORY	A	B	C	D
LPV DA	931-1¼ 358 (400-1¼)			
LNAV/VNAV DA	1176-2 603 (600-2)			
LNAV MDA	1220-1 647 (700-1)		1220-1¾ 647 (700-1¾)	1220-2 647 (700-2)
CIRCLING	1220-1 634 (700-1)		1220-1¾ 634 (700-1¾)	1220-2 634 (700-2)

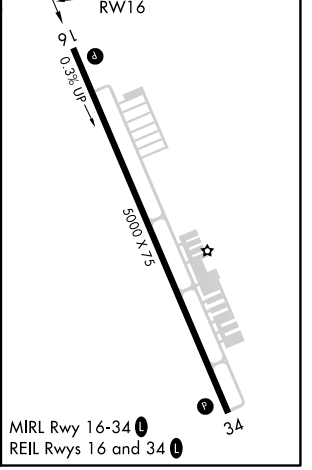

SE-4, 03 DEC 2020 to 31 DEC 2020
SE-4, 03 DEC 2020 to 31 DEC 2020