WAAS	APP CRS	Rwy Idg	5675
CH 70419	222°	TDZE	4310
W22A		Apt Elev	4314

RNAV (GPS) RWY 22

DEMING MUNI (DMN)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 40°C (104°F). Baro-VNAV NA when using Las Cruces altimeter setting. When local altimeter setting not received, use Las Cruces altimeter setting and increase all DA 114 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile, increase LNAV Cats C and D visibility ¼ mile, increase Circling Cat B visibility ¼ mile and Circling Cats C and D visibility ½ mile. Rwy 22 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 22 NA at night, Circling Rwy 8, 22 NA at night.

MISSED APPROACH: Climb to 9000 direct GINEC and on track 274° to FAAST and hold.

ASOS	ALBUQUERQUE CENTER	UNICOM
118.525	128.2 285.5	122.8 (CTAF) L

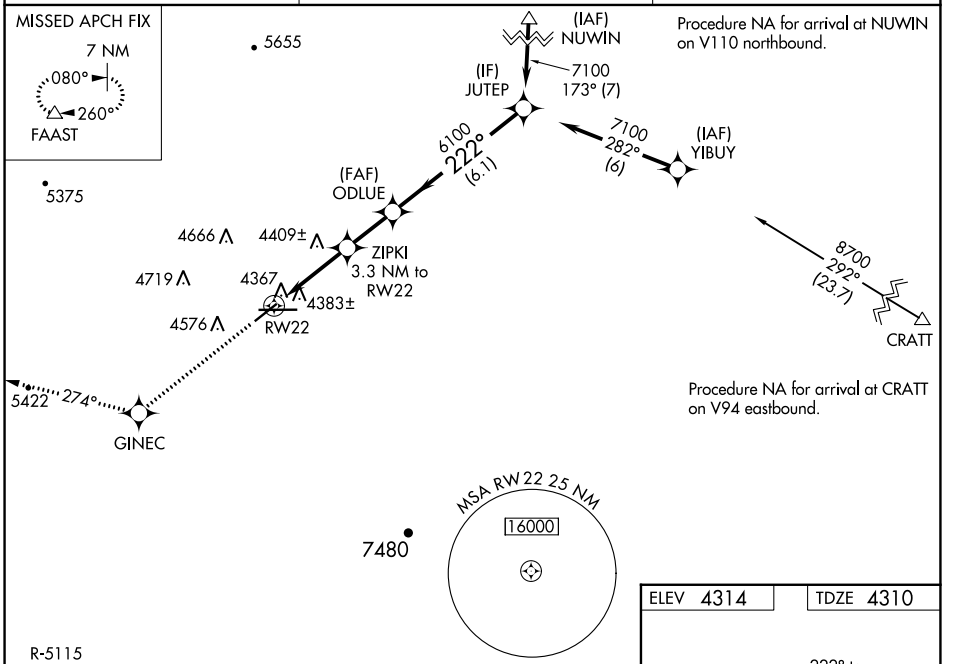

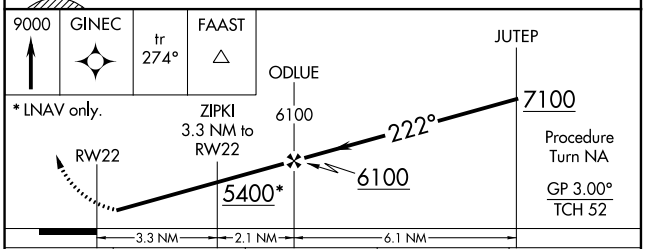

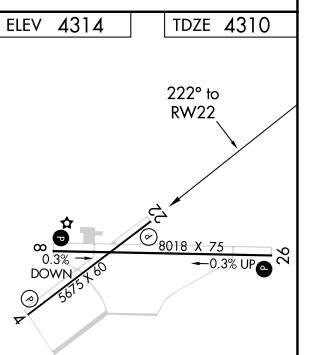

CATEGORY	A	B	C	D
LPV DA	4560-1 250 (300-1)			
LNAV/VNAV DA	4637-1¼ 327 (400-1¼)			
LNAV MDA	4660-1 350 (400-1)			4660-1¼ 350 (400-1¼)
C CIRCLING	4820-1 506 (600-1)	4940-1 626 (700-1)	5020-2 706 (800-2)	5020-2¼ 706 (800-2¼)

MIRL Rwy 4-22
MIRL Rwy 8-26 L

SW-1, 03 DEC 2020 to 31 DEC 2020
SW-1, 03 DEC 2020 to 31 DEC 2020