OAKLAND CENTER
125.75 284.65
UNICOM
122.8 (CTAF)
AWOS-3
118.05

TAKEOFF MINIMUMS

Rwy 9: Standard with minimum climb of 370′ per NM to 10500.
Rwy 27: Standard with minimum climb of 500′ per NM to 12700.

NOTE: Do not exceed 250K until established on 054° heading.
NOTE: Rwy 27 NA at night.

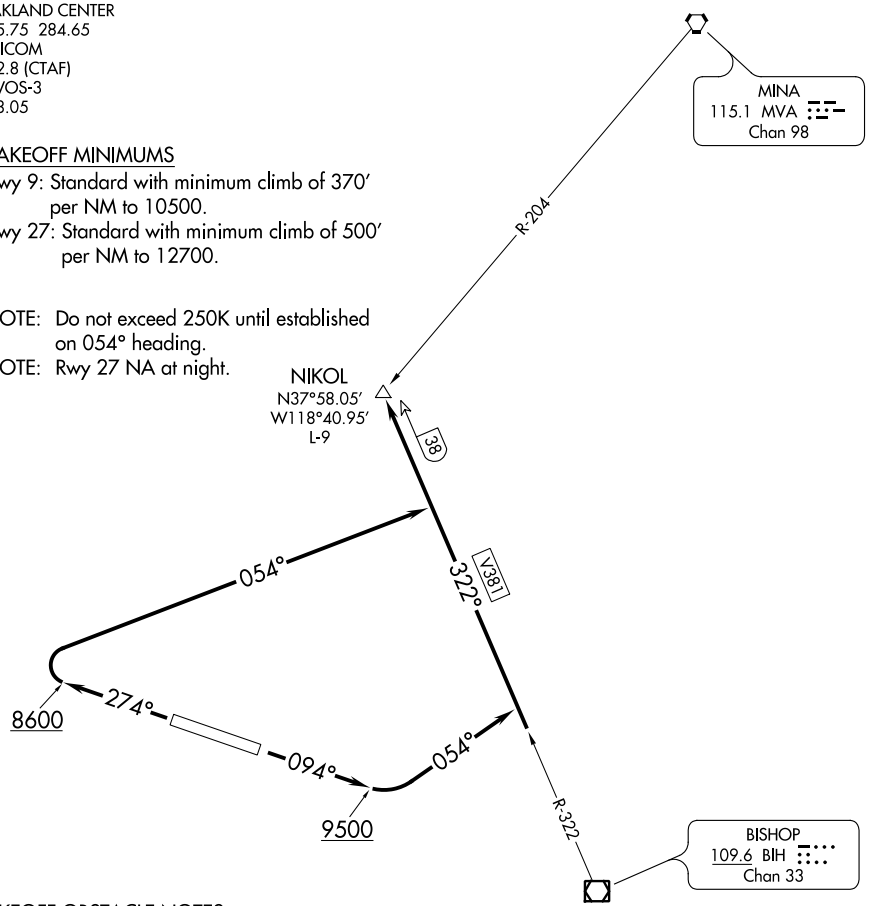

TAKEOFF OBSTACLE NOTES

Rwy 9: Vehicles on roadway beginning 11′ from DER, 460′ right of centerline, up to 17′ AGL/7078′ MSL.
Trees beginning 1956′ from DER, 554′ left of centerline, up to 100′ AGL/7186′ MSL.
Trees beginning 3994′ from DER, 963′ right of centerline, up to 100′ AGL/7252′ MSL.
Rwy 27: Vehicles on roadway and bushes beginning 178′ from DER, 269′ left of centerline, up to 17′ AGL/7160′ MSL. Building 386′ from DER, 434′ right of centerline, 21′ AGL/7155′ MSL.
Terrain and trees beginning 1.9 NM from DER, 334′ right of centerline, up to 68′ AGL/7970′ MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb heading 094° to 9500, then climbing left turn heading 054° to intercept BIH R-322 to NIKOL INT.

TAKEOFF RUNWAY 27: Climb heading 274° to 8600, then climbing right turn heading 054° to intercept BIH R-322 to NIKOL INT.

SW-2, 03 DEC 2020 to 31 DEC 2020
SW-2, 03 DEC 2020 to 31 DEC 2020