

WAAS
CH **93517**
W21A

APP CRS
208°

Rwy Idg
TDZE **879**
Apt Elev **918**

8002

RNAV (GPS) RWY 21

APPLETON INTL (ATW)

RNP APCH.

▼

Rwy 21 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C.

▲

MISSED APPROACH:
Climb to 2900 direct APIXE and hold.

ATIS 127.15	GREEN BAY APP CON* 126.3 338.2	APPLETON TOWER* 119.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

WAUSAU AUV

Procedure NA for arrivals at AUV VOR/DME on V26 westbound.

2900 117° (51.6)

2700 NoPT 118° (5)

4 NM

HOLD 6000 2700

(IAF) TIDME

(IF/IAF) ASIGE

2700 NoPT 298° (5)

(IAF) WUPON

2700 208° (6)

(FAF) SEMOE

TUCNY 1.6 NM to RW21

RW21 1010 1010

Procedure NA for arrivals at RABEE on V450 southeast bound.

RABEE 3100 291° (25.2)

MSA RW21 25 NM

3100

1344

MISSED APCH FIX APIXE

2900 APIXE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 47).

SEMOE

ASIGE

4 NM Holding Pattern

2700 208° 028° 6000 2700

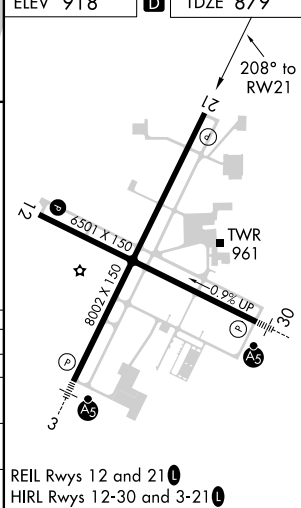
*LNAV only. TUCNY 1.6 NM to RW21

RW21

*1440

GP 3.00° TCH 50

1.6 3.9 NM 6 NM

	2900	APIXE	ELEV 918 TDZE 879					
CATEGORY	A	B	C	D				
LPV DA	1129-1		250 (300-1)					
LNAV/VNAV DA	1261-1¼		382 (400-1)					
LNAV MDA	1280-1	401 (400-1)	1280-1¼	401 (400-1¼)				
CIRCLING	1340-1 422 (500-1)	1380-1 462 (500-1)	1400-1½ 482 (500-1½)	1480-2 562 (600-2)				

REIL Rwy 12 and 21

HIRL Rwy 12-30 and 3-21

APPLETON, WISCONSIN

Amdt 2D 10SEP20

44°15'N-88°31'W

APPLETON INTL (ATW)

RNAV (GPS) RWY 21