


WAAS CH 63104 W25A	APP CRS 249°	Rwy Idg TDZE Apt Elev	6880 1725 1744
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25
PIERRE RGNL (PIR)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 4000 direct HOSTR and hold.
--	---

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.7	UNICOM 122.95
------------------------	--	----------------------	-------------------------

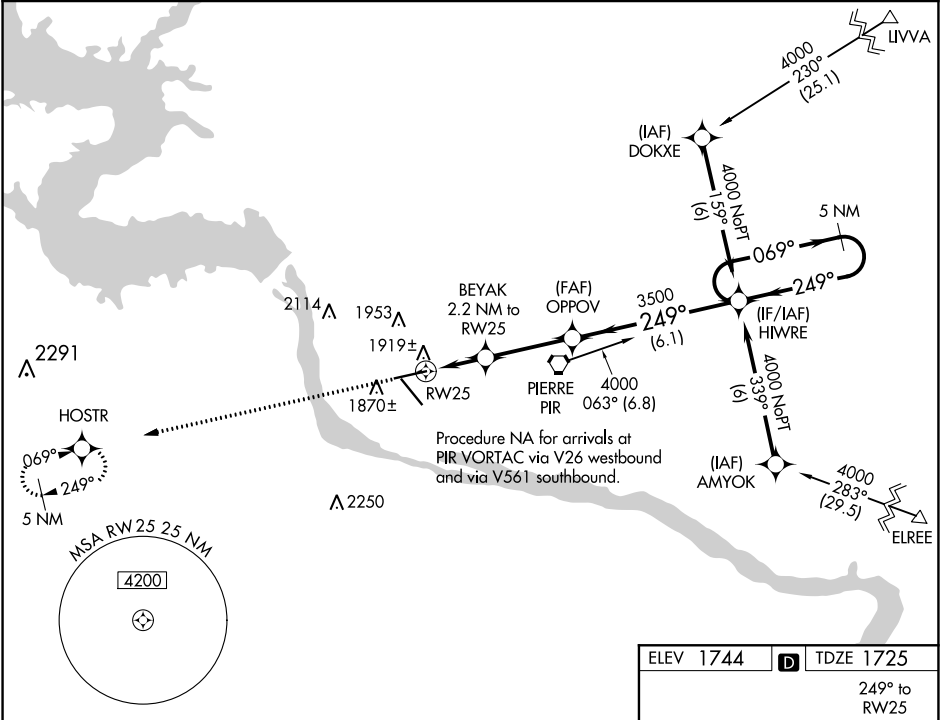

4000	HOSTR	BEYAK 2.2 NM to RW25	OPPOV	HIWRE	5 NM Holding Pattern
*LNAV only		*1.3 NM to RW25			
		2440*	3500	4000	GP 3.00° TCH 54
		1.3 NM	0.9	3.2 NM	6.1 NM
CATEGORY		A	B	C	D
LPV DA		1975-1	250 (300-1)		
LNAV/VNAV DA		2179-1¾	454 (500-1¾)		
LNAV MDA		2180-1	455 (500-1)	2180-1½ 455 (500-1½)	2180-1½ 455 (500-1½)
CIRCLING		2240-1	496 (500-1)	2260-1½ 516 (600-1½)	2300-2 556 (600-2)

