| WAAS CH 69218 W11A | APP CRS 110° | Rwy ldg 4400<br>TDZE 2925<br>Apt Elev 2925 |
|---|---|---|

# RNAV (GPS) RWY 11
## THOMAS COUNTY (TIF)

Baro-VNAV NA when using North Platte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received use North Platte altimeter setting and increase all DA 137 feet and all MDA 140 feet, increase LPV and LNAV/VNAV Cats A and B visibility ½ mile. VDP NA with North Platte altimeter setting.

MISSED APPROACH: Climb to 5000 direct NUXRO and hold.

| AWOS-3 | DENVER CENTER | CTAF |
|---|---|---|
| 120.825 | 127.95 338.2 | 122.9 |

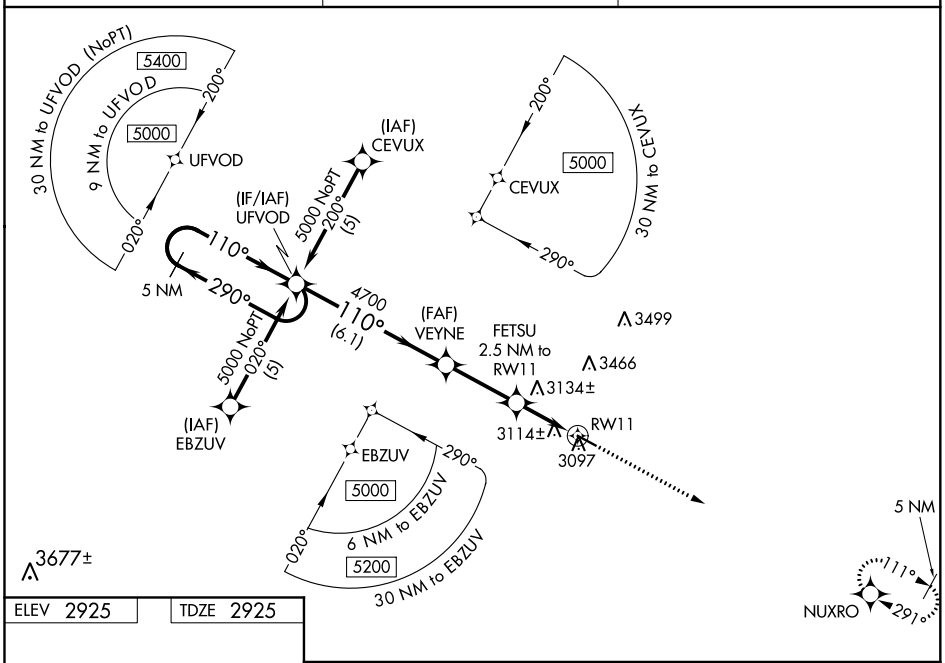


| ELEV 2925 | TDZE 2925 |
|---|---|

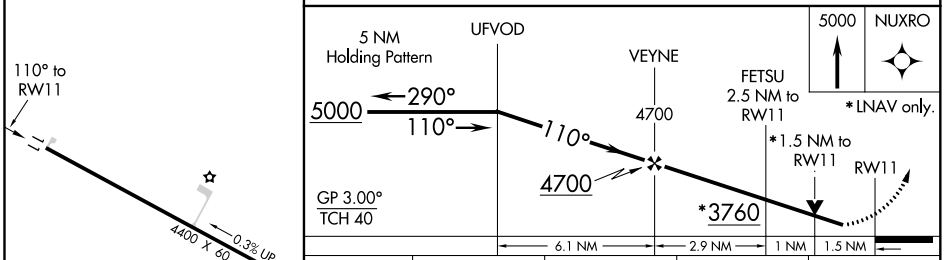


MIRL Rwy 11-29

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 3175-1 | 250 (300-1) | NA | |
| LNAV/VNAV DA | 3490-2 | 565 (600-2) | NA | |
| LNAV MDA | 3440-1 | 515 (600-1) | NA | |
| CIRCLING | 3480-1 | 555 (600-1) | NA | |



NC-2, 31 DEC 2020 to 28 JAN 2021
NC-2, 31 DEC 2020 to 28 JAN 2021