

LOC/DME I-CGI
109.5
Chan **32**

APP CRS
108°

Rwy Idg **6499**
TDZE **337**
Apt Elev **342**


ILS or LOC RWY 10
CAPE GIRARDEAU RGNL (CGI)

ADF required.
For inop ALS, increase S-LOC 10 Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct DUTCH LOM/I-CGI 7.2 DME and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

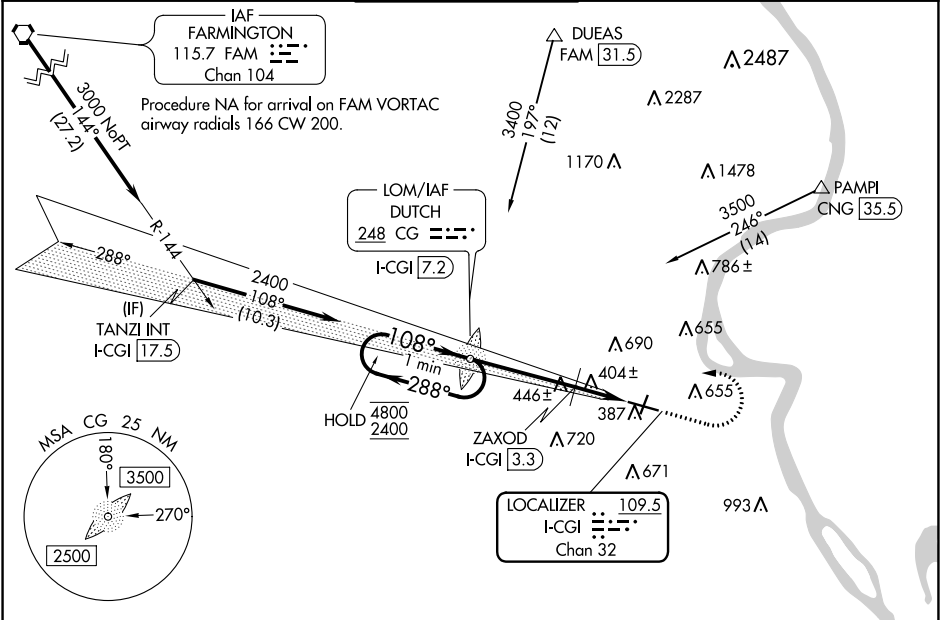

Use I-CGI DME when on the localizer course.

One Minute Holding Pattern

4800 2400 ← 288° 108° 2400

GS 3.00° TCH 54

CG DUTCH LOM I-CGI 7.2

1500 2400 CG

ZAXOD I-CGI 3.3

*LOC only

*1000

3.9 NM 1.2 NM 0.8 NM

108° 5.9 NM from FAF

TWR 404

393

28

CATEGORY	A	B	C	D		
S-ILS 10	537-½ 200 (200-½)					
S-LOC 10	1000-½ 663 (700-½)	1000-1½ 663 (700-1½)				
CIRCLING	1000-1 658 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)			
ZAXOD FIX MINIMUMS						
S-LOC 10	660-½ 323 (400-½)					
CIRCLING	860-1 518 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)		

MIRL Rwy 2-20

HIRL Rwy 10-28

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58