
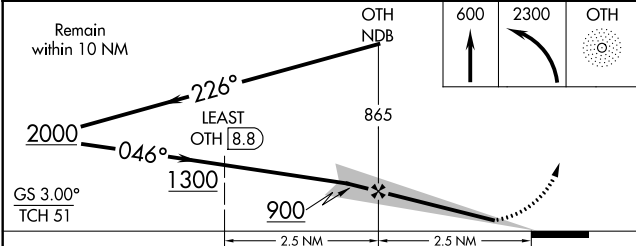


| | | | |
|-----------|---------|----------|------|
| LOC I-OTH | APP CRS | Rwy Idg | 5320 |
| 108.5 | 046° | TDZE | 16 |
| | | Apt Elev | 17 |

ILS or LOC RWY 5
SOUTHWEST OREGON RGNL (OTH)

| | | |
|--|-------|--|
| ADF and DME required. | MALSR | MISSED APPROACH: Climb to 600 then climbing left turn to 2300 direct OTH NDB and hold, continue climb-in-hold to 2300. |
| <p>▼ Circling Rwy 13, 31 NA at night. For inop ALS, increase S-ILS 5 all Cats visibility to ¾ mile, S-LOC 5 Cat C/D visibility to 1 ½ mile.</p> <p>▲ Missed approach requires minimum climb of 248 feet per NM to 800.</p> | | |

| | | | |
|---------------------|---------------------------------|--------------------------------------|------------------|
| AWOS-3PT 135.075 | SEATTLE CENTER 127.55 254.35 | NORTH BEND TOWER* 118.45 (CTAF) 0 | GND CON 127.1 |
|---------------------|---------------------------------|--------------------------------------|------------------|

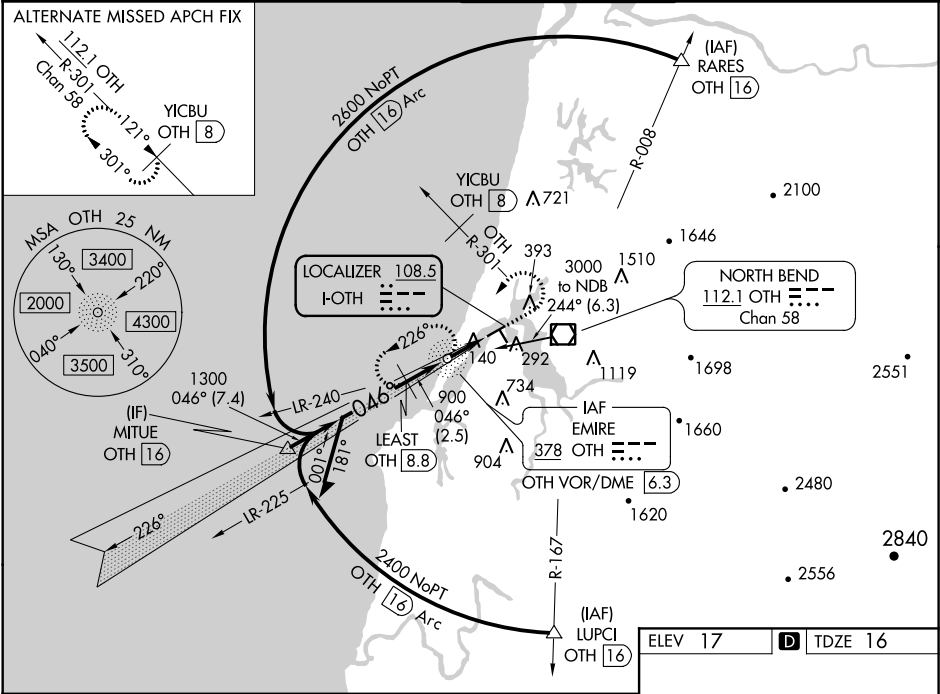

| | |
|------------------------|--------------------------|
| ELEV 17 | TDZE 16 |
| | |
| HIRL Rwy 5-23 | |
| MIRL Rwy 13-31 | |
| REIL Rws 13, 23 and 31 | |
| FAF to MAP 2.5 NM | |
| Knots | 60 90 120 150 180 |
| Min:Sec | 2:30 1:40 1:15 1:00 0:50 |

| CATEGORY | A | B | C | D |
|----------|----------------------|----------------------|-------------|-------------|
| S-ILS 5* | | 216-½ | 200 (200-½) | |
| S-ILS 5 | | 278-½ | 262 (300-½) | |
| S-LOC 5 | 400-½ | 384 (400-½) | 400-¾ | 384 (400-¾) |
| CIRCLING | 680-1 663 (700-1) | 820-1 803 (900-1) | NA | |

NW-1, 31 DEC 2020 to 28 JAN 2021

NW-1, 31 DEC 2020 to 28 JAN 2021