

APP CRS
079°

Rwy Idg **12312**
TDZE **13**
Apt Elev **13**

RNAV (RNP) Z RWY 8L

DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH.


MAISR

MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold.

For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C.

AS

D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (Rwy 8R/26L)	GND CON 121.9 348.6	CLNC DEL 121.4 281.4
-------------------------------	------------------------------------	---	-------------------------------	--------------------------------

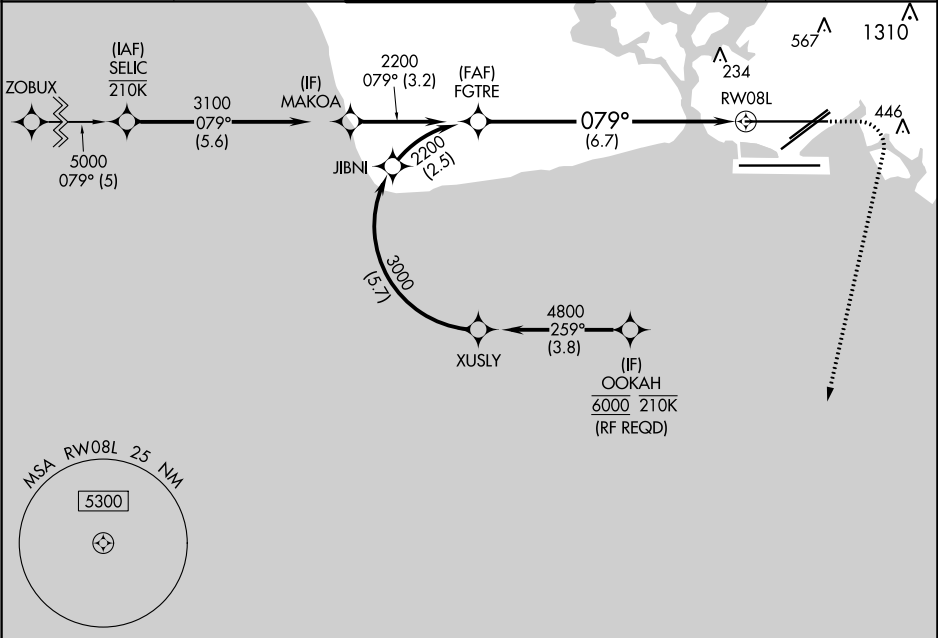

ELEV 13

D

TDZE 13

REIL Rwy 4L, 8R, 22L, 22R and 26R

HIRL Rwy 4L-22R, 4R-22L, 8L-26R and 8R-26L

ALANA

GP 3.00° TCH 56

MAKOA

3100

079°

2200

3.2 NM

6.7 NM

GP 3.00° TCH 56

343-½ 330 (400-½)

AUTHORIZATION REQUIRED

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

420

3000

ALANA

See planview for multiple IF locations.

RW08L