RNAV (GPS) RWY 18

JASPER COUNTY-BELL FIELD (JAS)

WAAS	APP CRS	Rwy Idg	5500
CH 87013	177°	TDZE	213
W18A		Apt Elev	213

Baro-VNAV NA when using De Ridder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using De Ridder altimeter setting. When local altimeter setting not received, use De Ridder altimeter setting and increase all DA 85 feet, all MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C visibility ¼ mile, Circling Cat C ¼ mile.

MISSED APPROACH: Climb to 3000 direct BRIRR and hold.

AWOS-3	HOUSTON CENTER	UNICOM
118.375	126.95 363.05	122.8 (CTAF) L

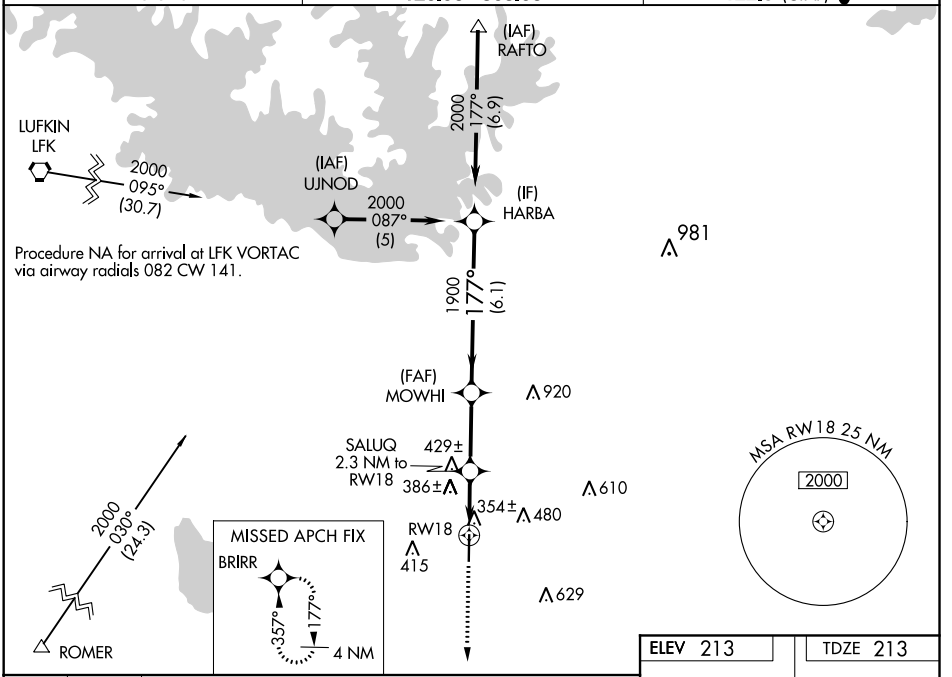

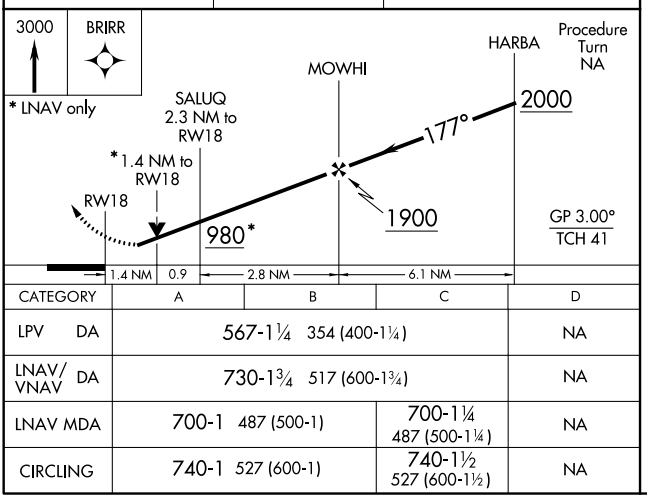

CATEGORY	A	B	C	D
LPV DA	567-1¼ 354 (400-1¼)			NA
LNAV/VNAV DA	730-1¾ 517 (600-1¾)			NA
LNAV MDA	700-1 487 (500-1)		700-1¼ 487 (500-1¼)	NA
CIRCLING	740-1 527 (600-1)		740-1½ 527 (600-1½)	NA

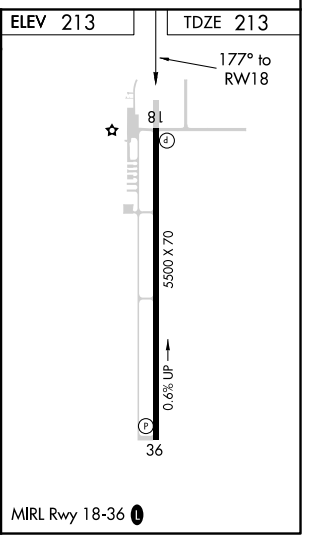

SC-5, 31 DEC 2020 to 28 JAN 2021
SC-5, 31 DEC 2020 to 28 JAN 2021