



ATIS 135.1
CLNC DEL 126.05
CPDLC
GND CON
121.9 348.6
NASHVILLE TOWER
118.6 257.8
NASHVILLE DEP CON
119.35 372.0

TOP ALTITUDE:
4000

- NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: Radar required.
NOTE: For Turbojet aircraft only.
NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
NOTE: If unable to accept climb rates, advise ATC on initial contact.

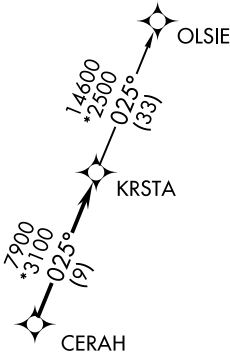

TAKEOFF MINIMUMS:
Rwys 2C, 2L, 2R, 13, 20L, 31:
Standard with minimum
climb of 500' per NM to 1100.
Rwys 20C, 20R: Standard with
minimum climb of 500' per NM
to 1300.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWYS 2L/C/R: Climb heading 021° or assigned ATC heading, thence....
TAKEOFF RWY 13: Climb heading 136° or assigned ATC heading, thence....
TAKEOFF RWYS 20L/C/R: Climb heading 201° or assigned ATC heading, thence....
TAKEOFF RWY 31: Climb heading 316° or assigned ATC heading, thence....

....expect radar vectors to CERAH, then on track 025° to KRSTA. Maintain 4000.
Expect clearance to filed altitude within five (5) minutes after departure.

OLSIE TRANSITION (KRSTA3.OLSIE)