

WAAS CH <b>62923</b> <b>W28A</b>	APP CRS <b>283°</b>	Rwy Idg TDZE <b>546</b> Apt Elev <b>546</b>
--	------------------------	---

RNAV (GPS) RWY 28

ASHLAND RGNL (DWU)



▼

▲

DME/DME RNP-0.3 NA. When local altimeter setting not received; use Huntington altimeter setting, increase all MDA 80 feet and all Circling visibilities ¼ mile. VDP NA when using Huntington altimeter setting.

MISSED APPROACH:  
Climb to 3300 direct  
NYOME and hold.

AWOS-3PT <b>132.425</b>	HUNTINGTON APP CON <b>128.4 270.1</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
----------------------------	--	--------------------------	--

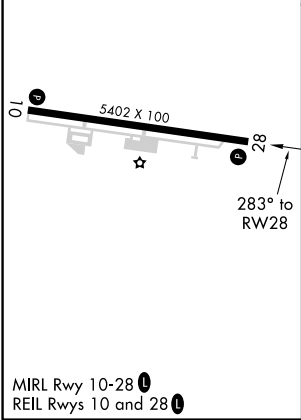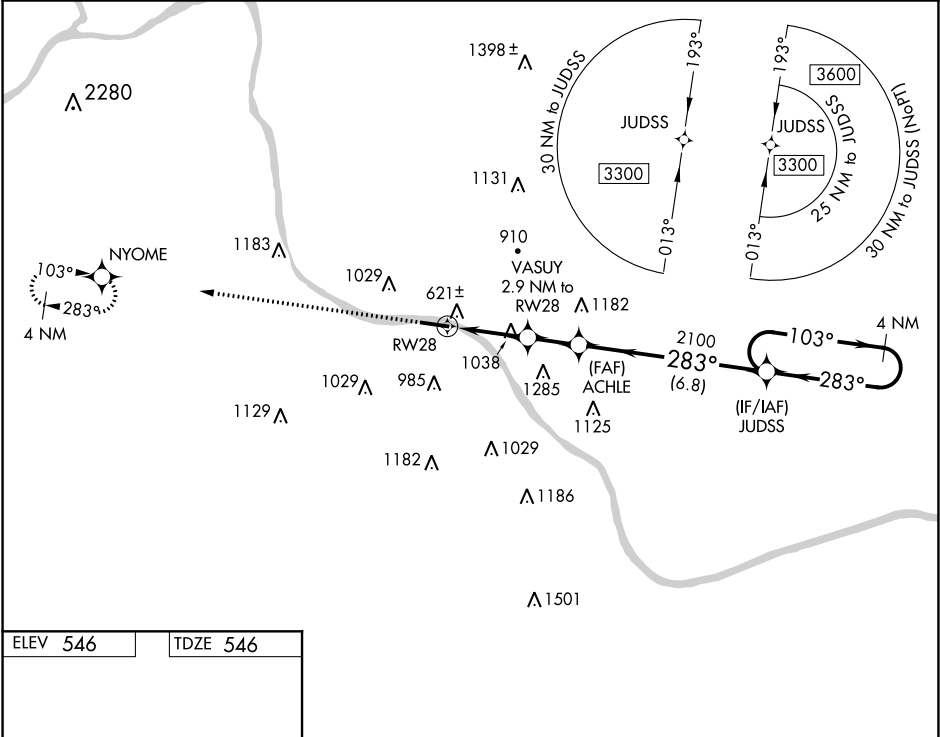

3300	NYOME	Descent Angle NA.			
		VASUY 2.9 NM to RW28	ACHLE	JUDSS	4 NM Holding Pattern
		1.7 NM to RW28			
		1.7 NM	1.2 NM	1.8 NM	6.8 NM
CATEGORY	A	B	C	D	
LP MDA	1340-1 794 (800-1)	1340-1¼ 794 (800-1¼)	1340-2½ 794 (800-2½)		
LNAV MDA	1340-1 794 (800-1)	1340-1¼ 794 (800-1¼)	1340-2½ 794 (800-2½)		
CIRCLING	1340-1 794 (800-1)	1380-1¼ 834 (900-1¼)	1400-2½ 854 (900-2½)	1420-2¾ 874 (900-2¾)	