

| | | | |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS CH 57918 W05A | APP CRS 049° | Rwy Idg TDZE Apt Elev | 4508 191 195 |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|




RNAV (GPS) RWY 5
ORANGEBURG MUNI (OGB)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Rwy 5 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Columbia Metropolitan altimeter setting. When local altimeter setting not received, use Columbia Metropolitan altimeter setting and increase LPV DA to 542, LNAV/VNAV DA to 683 and all MDA 80 feet, increase visibility LPV and LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C/D ¼ SM. Night landing: Rwy 17 NA.

ODALS

MISSED APPROACH:
Climb to 2000 direct
FOLGI and hold.

| | | | |
|------------------------|-----------------------------------------|---------------------------------|-----------------------|
| ASOS 118.525 | COLUMBIA APP CON 124.15 338.2 | UNICOM 122.7 (CTAF) 0 | GCO 125.675 |
|------------------------|-----------------------------------------|---------------------------------|-----------------------|

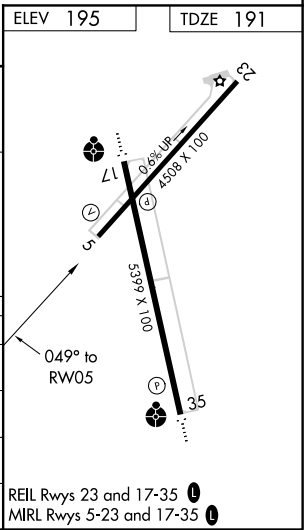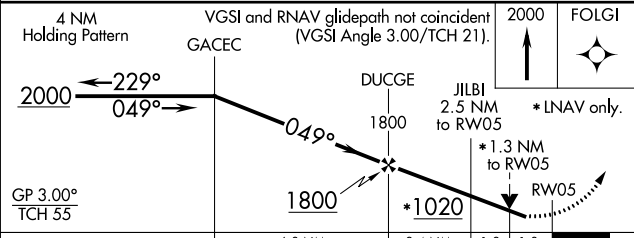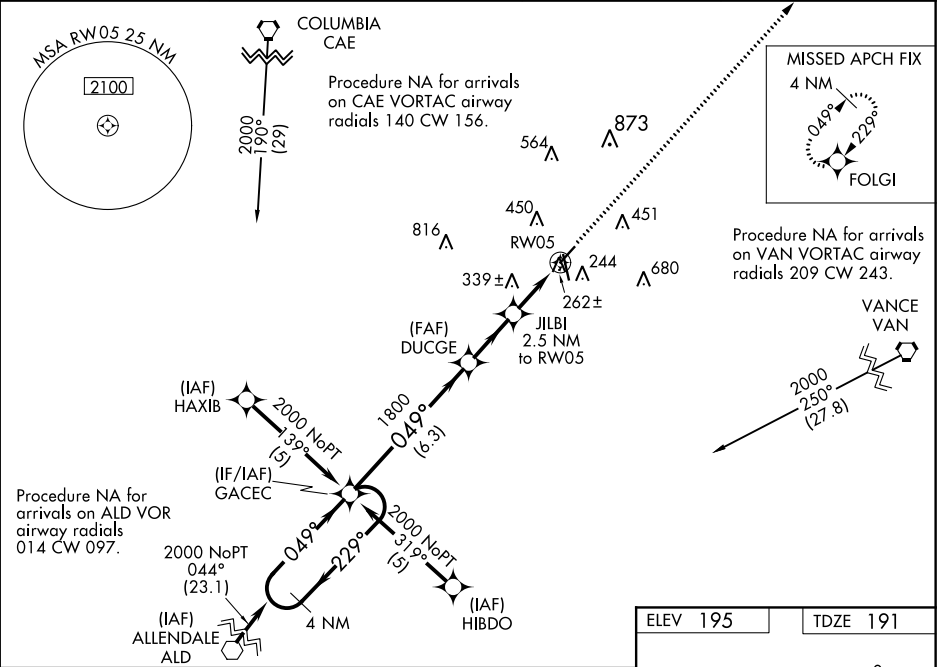

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA | 463-1 | | 272 (300-1) | |
| LNAV/VNAV DA | 604-1½ | | 413 (500-1½) | |
| LNAV MDA | 600-1 | 409 (500-1) | 600-1¼ 409 (500-1¼) | 600-1½ 409 (500-1½) |
| CIRCLING | 720-1 525 (600-1) | 800-1 605 (700-1) | 800-1¾ 605 (700-1¾) | 900-2¼ 705 (800-2¼) |

SE-2, 31 DEC 2020 to 28 JAN 2021

SE-2, 31 DEC 2020 to 28 JAN 2021