


| | | |
|--|------------------------|---|
| WAAS CH 72640 W20A | APP CRS 200° | Rwy Idg TDZE 5605 Apt Elev 5622 |
|--|------------------------|---|

RNAV (GPS) RWY 20

CEDAR CITY RGNL (CDC)

| | | |
|--|-----------|---|
| RNP APCH. Cirdling NA east of Rwy 2-20. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C/D visibility to 1½ SM. | MALSR | MISSED APPROACH: Climb to 9800 direct ZUMAS and on track 281° to WULMU and on track 334° to BERYL and hold. |
|--|-----------|---|

| | | |
|------------------------|---|---------------------------------|
| ASOS 119.025 | SALT LAKE CITY CENTER 125.575 379.275 | UNICOM 123.0 (CTAF) 0 |
|------------------------|---|---------------------------------|

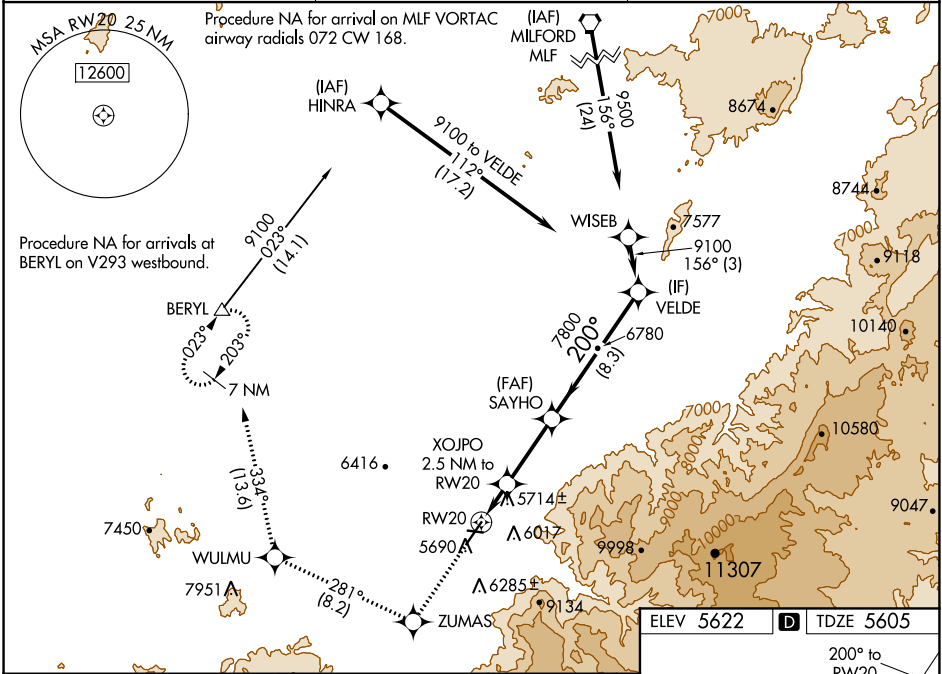

| | | | | | | | |
|--------------|--------------------|--------------------|----------------------|--------------------|-------|-------|-----------------|
| 9800 | ZUMAS | tr 281° | WULMU | tr 334° | BERYL | SAYHO | VELDE |
| *LNAV only | | | | | | | |
| | | | XOJPO 2.5 NM to RW20 | | | 7800 | 9100 |
| | | | *1.6 NM to RW20 | | | 6440* | 7800 |
| | | | | | | | GP 3.00° TCH 47 |
| | | | | | | | |
| CATEGORY | A | B | C | D | | | |
| LPV DA | | 5825-½ 220 (300-½) | | | | | |
| LNAV/VNAV DA | | 6015-¾ 410 (400-¾) | | | | | |
| LNAV MDA | 6180-½ 575 (600-½) | | 6180-1¼ 575 (600-1¼) | | | | |
| CIRCLING | 6180-1 558 (600-1) | | 6180-1½ 558 (600-1½) | 6180-2 558 (600-2) | | | |

